

3D miniLDV™

Integrated 3D miniature laser Doppler velocimeter


The 3D miniLDV sensor incorporates (1) 2D miniLDV and (1) 1D probes into a single structure with adjustment for co-locating probe volumes. The 3D system could also be fabricated using (3) 1D miniLDV sensors. In each case, adjustment mechanisms are used for alignment of the probe volume. Setting up takes less than a few hours.

ADVANTAGES OF THE 3D MINI-LDV:

- Self-contained
- Factory sealed individual probes
- High power lasers at 660, 785 and 830 nm
- Adjustment mechanisms / structures provided
- No calibration needed
- Frequency shifting on all components
- No water cooling required
- Accurate measurement of fluids of varying temperature, pressure, and density
- Computer controlled 1, 2, and 3-axis traversing system
- 2D and 3D automated profile measurement
- Battery operated option
- Options such as water-proof housing


APPLICATIONS INCLUDE:

- Fluid mechanics, aerodynamics, turbulence, oceanography, and atmosphere studies
- Wind, water, oil tunnels and channels

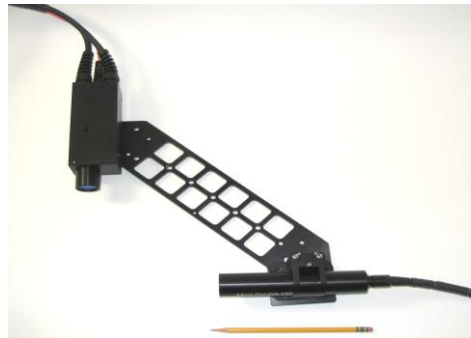


The 3D miniLDV probe is extremely compact, self contained, and permanently attached to a structure; no calibration or alignment by the user is required. The probe contains three high power lasers, miniature beam shaping optics, and detection optics.

2D Flow Mapping with miniLDV™

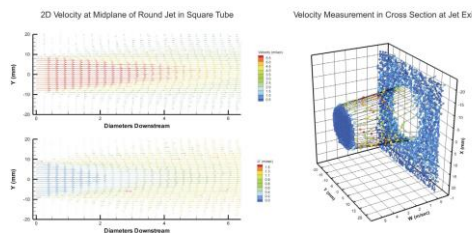

The 3D miniLDV System includes the 3D miniLDV probe, Processing Engines, and a multidimensional Burst Processor Acquisition Manager software. With the optional computerized traverses, setting up a flow-mapping experiment for unattended acquisition is a matter of minutes, not hours.

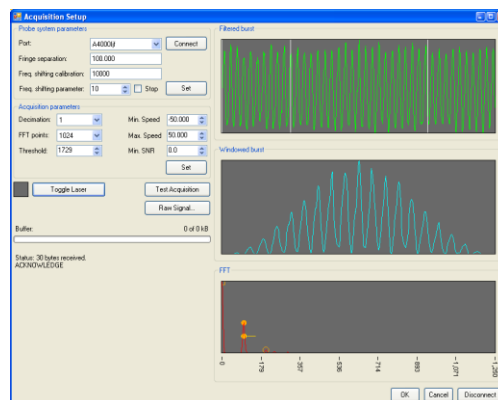

The interface of the acquisition software complements the probe's ease of use.

MEASUREMENT SPECIFICATIONS	
Velocity range	-50 to 300 m/sec
Repeatability	0.1%
Accuracy	99.7% or better

PROBE VOLUME	
Size (air) (x by y by z)	20 by 40 by 100 μ m to 100 by 200 by 1200 μ m (depends on standoff distance)
Standoff distance (air)	1.30, 1.97, 3.94, 5.91, or 9.45 inches (33, 50, 100, 150, or 240 mm)

PROBE SPECIFICATIONS	
Probe weight	500g
Dimensions	Depends on final configuration

LASER SPECIFICATIONS	
Laser power	3 x 80 mW
Wavelength	660, 785 and 830 nm
Laser type	Class IIIb

OPERATING PARAMETERS	
Temperature	0 to 65°C
Pressure	Atmospheric
PC requirements	Laptop or PC

OPTIONAL FEATURES	
Water resistant housing	
High pressure & temperature housing	
Traversing stage for profile measurements	
Battery operated	
1-D, 2-D, and 3-D traversing systems	

POWER SUPPLY	
12 VDC power supply	
12 Volt battery (optional)	

U.S. Patent No. 6,654,102



MEASUREMENT
SCIENCE
ENTERPRISE, INC.

123 W. Bellevue Dr., Suite 1
Pasadena, CA 91105
USA

Info@MeasurementSci.com
Phone: +1 (626) 577 0566
Fax: +1 (626) 577 0565